



CASCOS



LIFTING PROFESSIONALS


4 POST LIFTS

C-440 MOT ATL 4 Tn.

CLASS IV

Model	Ref.			H. min.		
C-440 MOT ATL	13.353A	4.000 Kg.	950 Kg.	135 mm.	400/230 V. 3 Kw.	35"

MOT ATL (CLASS IV) LIFT 4335 mm platform

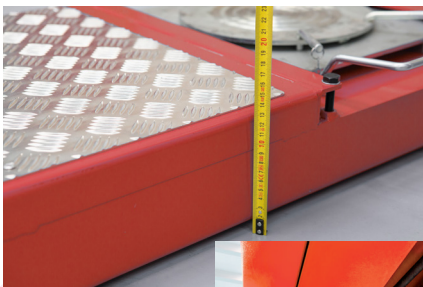

Specially designed platform with only 135mm height, allowing our lift to be installed in low depth existing recesses.



Minimal height. 135 mm

* Photo version surface mounted.

Hydraulic Cylinders manufactured internally and 100% tested before assembly.



Warranty 5 YEARS Hydraulic

SEE CONDITIONS


Alerts

Indicator that prevents a bad levelling, and ensures that the cylinder works within the best conditions assuring a **longer lasting life**.



Security x2

Double system of security, **mechanical** (ladders and safety bars) and **pneumatic** that ensures a better reliability than the electro-magnetics systems

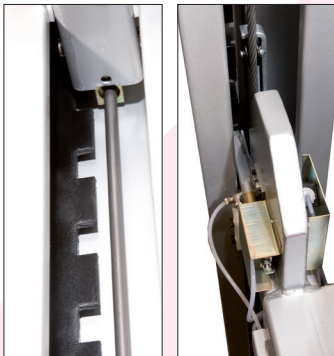

In case of irregular floors the lift can be levelled in 4 points, allowing a correct head lamp a in testing.


Three possible adjustable with between platforms

New luxury control box.

- Totally steel construction.
- Durable design.
- Integrates all the electronics and control of the lift and the play detector.
- Simple and reliable design.
- One single specially designed hydraulic power unit controls the main lift and the play detector.
- Motor and pump placed on top of the post, reducing space constraints.



Wired control lamp



Hydraulic play detector

Lift includes play detector listed on VOSA accepted equipment, securely integrated with recesses to design integrate turning plates and fix them according to the MOT Scheme Management.




After-Sales Quality & Service prize



2006/42/CE & EN-1493:2011 European Directives & Approved Standards




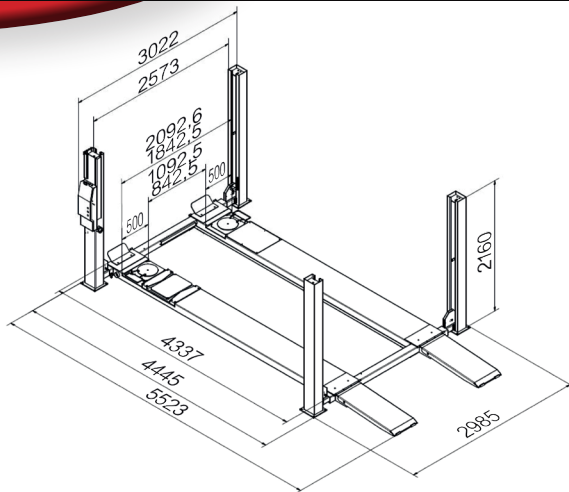

Mod.	Ref.
C 440 MOT ATL	13.353A

Options

Jacking beams

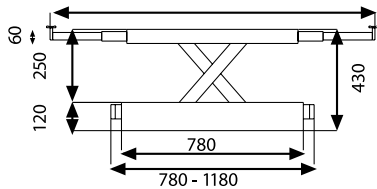

TWO TYPES *:

- Manual: 2 T Ref.: 50541
- Automatic (pneumatic) driven motor/pump Ref.: 50546



* IMPORTANT: C-440 MOT ATL requires support Ref. 50545

Turning plates

Ref.: 34275C



Set of 40 mm. height turning plates.

Surface mounted ramps

Ref.: 33500_DH



Accessories

Magnetic lighting kit

Without installation




Ref.: 34053 LED 24 V

Magnetic holder for tools



Magnetic air Kit




Ref.: 26177

Top Covers



Ref.: 32129
C - 440/42/
43/45/50/55

Recessed ramp



Ref.: 33001

Integrated power plug Assembled in factory



Ref.: 22164